

inTCxxIP2MP36 Series



Tower Camera

2 Mega
Pixel

30FPS

Triple
Stream

H.264
MPEG4
MJPEG

3D
DNR

D-WDR

PoE
12VDC

OnVIF

The **Remote Alert Tower Cameras** are designed for applications where high resolution close ups are required of individuals during transactions.

Cameras are mounted in aesthetically pleasing housings that can easily be mounted at payment windows, teller points, or other locations where transactions may take place.


Applications:

- Banking
- Retail
- Immigration Control
- Car Rental
- Airline Security
- Licensing

With its advanced features, the 2MP camera allows full command and control of video parameters such as resolution, bit rate and frame rate. Offering D-WDR performance combined with 3D Digital noise reduction, this compact camera will produce high quality video in the varying light conditions experienced in modern installations. The small footprint of the camera allows versatility for placement and mounting. Capture full facial views of the person as they walk up to the counter/desk or as they drive up to the service window. Get the quality image you need with Remote ALert's HD-IP Tower camera.

- 8", 16", 20", 24" lengths available
- Counter Top Mount
- Capture Full Facial images
- 3.6mm lens
- Black Finish
- 2.1 Mega Pixel Sensor
- Full HD 2MP Image
- Triple Stream (H.264/MJPEG/MPEG4)
- Max 30 FPS
- D-WDR
- Simple Web interface
- Onvif Support
- 12VDC or PoE

Dimensions of
24"
Tower Camera

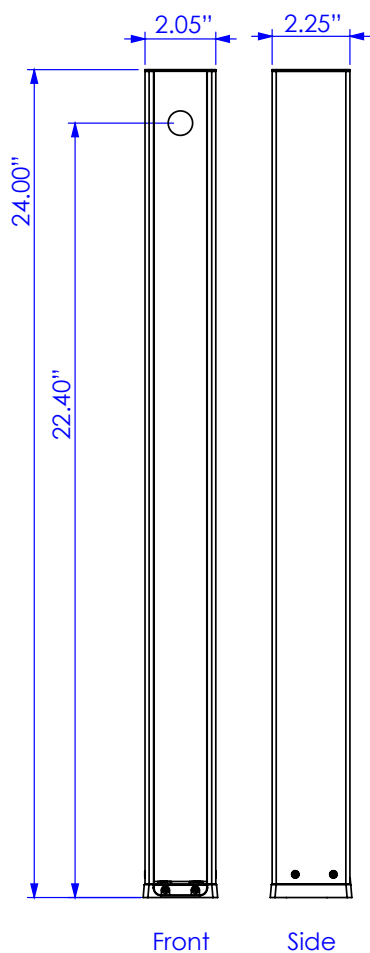

System	Image Sensor	2.1 MP Sensor
	LED's	Power / Lan
Video	Compression	H.264 / M-JPEG /MPEG4
	Resolution	1920x1080, 1280x720, 720x576, 640x360, 320x180
	Stream	Triple Stream H.264 x 1, M-JPEG x 1, MPEG4 x1
	Bit rate type	Constant(CBR), Variable(VBR)
	Bit Rate	128~8192
	Frame rates	Up to 30fps
	Image Quality	1~99
	Interface	Network Output
	Sensitivity	0.01 Lux
	S/N Ratio	>52dB
	Day/Night	Yes
Lens	Focal Length	3.0mm
Image	Function	Color or Black & White
		Saturation, Contrast, Brightness, Sharpness, Hue, Denoise
Network	LAN Interface	10/100 BaseT Ethernet Auto Sensing
	Protocols	RTP/RTSP, Unicast RTP, Multicast RTP
	ONVIF	ONVIF Version 2.4
Viewer	Browser	IE
Security	Password	Multi-level user access with password protection
Power	Power Consumption	12VDC ±10% 4W max or PoE
Installation/ Maintenance		Configure by Installation wizard
Operating Environments	Temperature	0°C ~ 50°C (32°F ~ 122°F)
	Humidity	Less than 90%, non condensing
Ordering	8"	inTC08IP2MP36
	16"	inTC16IP2MP36
	20"	inTC20IP2MP36
	24"	inTC24IP2MP36

Remote Alert reserves the right to amend specifications and design without prior notice