



# REMOTE ALERT

## Indoor/Outdoor WDR TVI/Analog Bullet Camera



Full HD  
1080P

TDN  
WDR

IR

2.8-12mm

TVI  
&  
Analog


IP68

Service  
Jack

12VDC

The Remote Alert in71TVI3 is the next generation in our line of Indoor / Outdoor IR Bullet Cameras. Offering Full HD resolution, TVI and Analog outputs, IR LED array, new Wide-D WDR performance combined with 3D Digital Noise reduction, this compact camera will produce high quality video in the varying lighting conditions experienced in modern installations. The in71TVI3 series bullet camera is flexible enough to meet any installation requirement..

- Die Cast Construction
- Sun Shield
- Thermal Management
- IP68
- Mega Pixel Sensor
- Full HD (1080P)
- True Day/Night Function
- 8 Super IR LED's
- Effective IR Range 100ft
- Min. Illumin. 0 Lux IR on, 0.01 Lux
- Wide Dynamic Range (WDR)
- Backlight Compensation (BLC)
- Highlight Mask (HLM)
- Dual Output, TVI & CVBS Analog
- DEFOG
- 3D DNR
- Sens Up
- Selectable Shutter Speeds
- ATW / AWC White Balance
- Privacy Zones
- Wire Management Mount
- On board Service Jack
- 12VDC

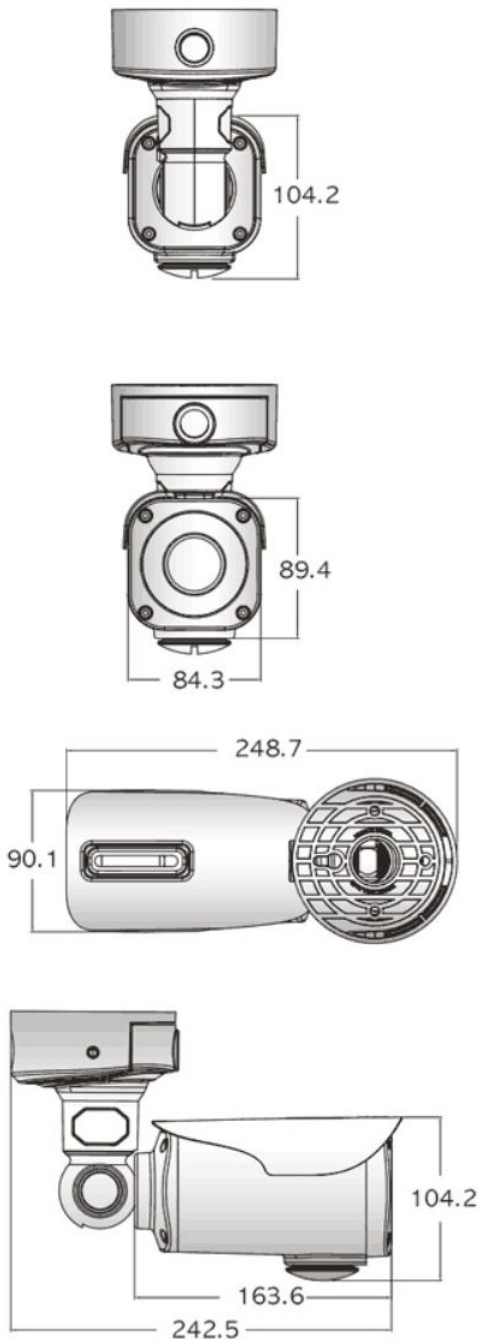

Unit : mm

	System	NTSC
<b>Imaging</b>	Sensor	Mega Pixel Sensor
<b>Performance</b>	TVI Resolution	Full HD (1080P)
	Analog Resolution	1000TVL
	Wide Dynamic Range	Yes
	Sensitivity	0.01Lux
	S/N Ratio	52dB
	Day / Night	Yes
<b>Lens</b>	Type	DC
	Focal Length	2.8~12mm
<b>IR</b>	LED's	8 Super LED's
	Effective Range	15~25 Meters
<b>Functions</b>	OSD	English/Chinese
	Shutter	1/30~1/30,000
	Wide Dynamic Range	Off/Low/Medium/High
	HLC (High Light Mask)	Level Control
	BLC (Back Light Comp)	Off/Low/Medium/High
	AGC	Off/Adjustable Level
	Sens Up	Adjustable level
	Electronic shutter	Yes
	White Balance	AWB/Auto, Autoext, Preset, Manual
	DNR	Yes
	Gamma	0.35~0.55
	Color Gain	Adjustable
	Motion Detection	Yes
	Privacy masking	Yes
	Image functions	Flip, Mirror,
	<b>Input/Output</b>	Video Output
CVBS 1.0Vp-p 75Ω		
		CVBS 1.0Vp-p 75Ω - Service port
	Programming interface	On board OSD Button
<b>Power</b>	Voltage	12VDC ±10%
	Power	7W Max.
<b>Environmental</b>	Operating Temperature	-10°C~+50°C
	Humidity	Less than 90%, non condensing
<b>Physical</b>	Construction	Die Cast Construction
	Dimensions	249mm x 104mm x 91mm
	Weight	550g
<b>Order Codes</b>	2.8~12mm	in71TVI3N2D28V12

*Remote Alert reserves the right to amend specifications and design without prior notice*