


inTCxxS7N2D30

4-in-1 WDR Tower Camera Series

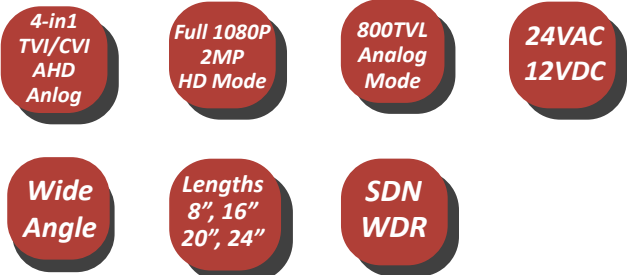

The **Remote Alert** Tower Cameras are designed for applications where high resolution close ups are required of individuals during transactions.

Cameras are mounted in aesthetically pleasing housings that can easily be mounted at payment windows, teller points, or other locations where transactions may take place.


Applications:

- Banking
- Retail
- Immigration Control
- Car Rental
- Airline Security
- Licensing

Features:

- 8", 16", 20", 24" lengths available
- Counter Top Mount
- 3.0mm Lens
- Ultra High 800 TVL in Analog Mode
- Full 1080P in HD Mode
- Selectable Output TVI, CVI, AHD, Anlog
- Wide Dynamic Range (WDR) 130db
- OSD Menu
- Privacy Zones
- Sens Up
- 12VDC or 24VAC

Dimensions of
24"
Tower Camera

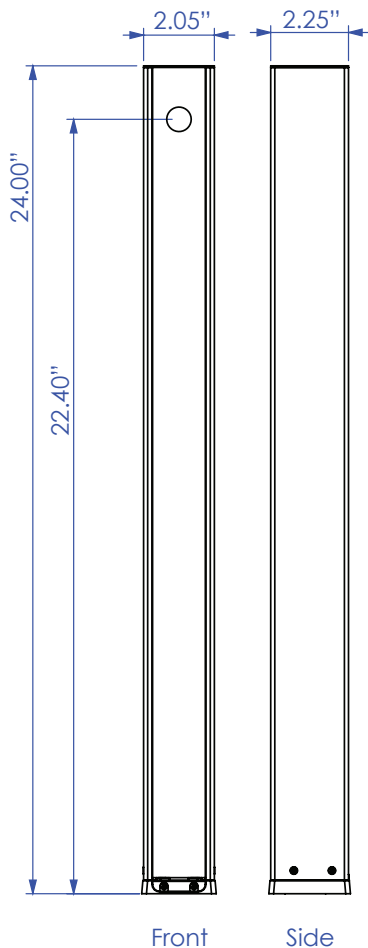

	System	NTSC	
Imaging	Sensor	Mega Pixel Sensor	
	Effective Pixels	1920 x 1080	
Performance	Resolution HD	1080P Full HD	
	Resolution Analog	800TVL	
	Wide Dynamic Range	130dB Max	
	Sensitivity	0.03Lux	
	S/N Ratio	52dB	
	Day / Night	Software Controlled	
Lens	Type	Fixed	
	Focal Length	3.0mm	
Functions	Video Interface	Analog, HD Mode TVI, CVI AHD	
	OSD	Multiple Language	
	Flickerless	On/Off	
	Wide Dynamic Range	Off/Low/Medium/High	
	HLC (High Light Supp)	Off/Low/Medium/High	
	BLC (Back Light Comp)	Off/Low/Medium/High	
	DEFOG	Off/Low/Medium/High	
	AGC	Off/Adjustable Level	
	Sens Up	Adjustable level	
	Electronic shutter	YES	
	Sync	Internal	
	Camera ID Number	Off/On 1~255	
	Camera Name	Off/On, 15 Characters	
	White Balance	ATW/Push/Manual	
	DNR	2D + 3D Off/Low/Medium/High	
	Gamma	0.35~0.55	
	Motion Detection	4 areas, Off/On, Position & Sensitivity	
	Privacy masking	8 areas, Off/On, Color, Position	
	Image functions	Flip, Mirror, D-Zoom	
	Input/Output	Video Output	CVBS 1.0Vp-p 75Ω
		Programming interface	Controller
	Power	Voltage	12VDC or 24VAC ±10 %
		Power	4.2W Max.
Environmental	Operating Temperature	-10°C~+50°C	
	Humidity	Less than 90%, non condensing	
	Dimensions	2.05"W x 2.25"D	
	Weight	up to 2.4lbs	
Order ID	8" Tower Camera	inTC08S7N2D30	
	16" Tower Camera	inTC16S7N2D30	
	20" Tower Camera	inTC20S7N2D30	
	24" Tower Camera	inTC24S7N2D30	

Remote Alert reserves the right to amend specifications and design without prior notice